


BLE Wall dimmer



1 Master Selector Switch:

1. Press button to turn all lights on/off;
2. Long press (about 3s) to select all lights;
3. Press 5 times rapidly to unbind the device;

2 Group Selector Switch:


1. Press button to turn group light on/off;
2. Long press (about 3s) to select group light;

3 Brightness Control Button:


1. Press "BRT+" to increase brightness, and press "BRT-" to decrease brightness;

Prerequisites

Group all luminaires by zone, with each zone controlled by an independent power switch

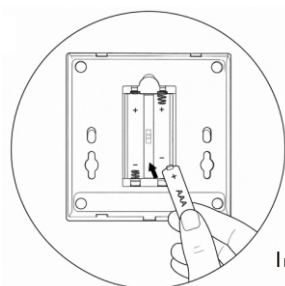


Install AAA batteries into the controller

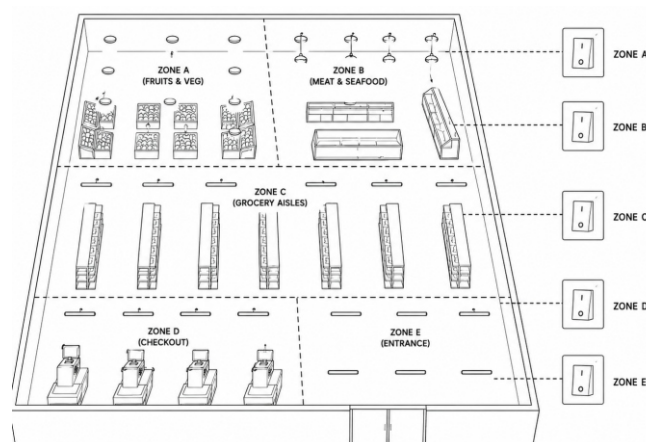

Quick Operation



Bind Device

Turn on the zone switch while pressing and holding the zone button on the wall controller. Continuous flashing of the luminaire indicates successful pairing

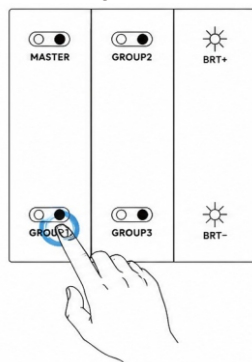


Adjust Brightness

Press and hold the zone button for about **3 seconds** (or select the Master button to control all luminaires), then press and hold "BRT+" or "BRT-" to adjust the brightness.

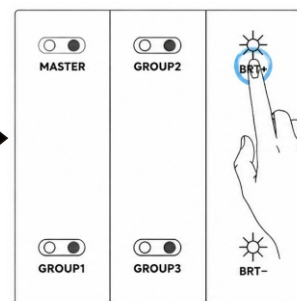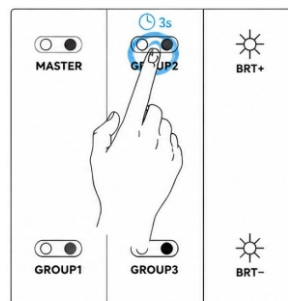


Light Switch

Click the zone switch to turn the zone ON/OFF; click the MASTER switch to turn all lights ON/OFF.

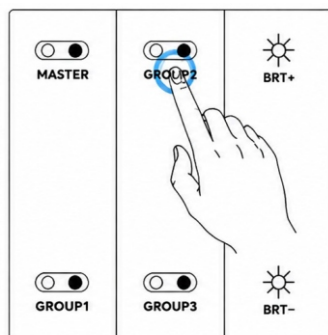

Unbind Device

Turn off the zone switch and wait for at least **5 seconds** to allow the driver's capacitors to fully discharge. Turn the zone switch back on, then press the MASTER switch **5 times** in quick succession. The zone luminaires will flash continuously, indicating successful unbinding.



5s



1s

