




Double Panel Track Light

The LL1615 Series is a high-output dual-panel LED track linear light designed for large retail, supermarket, and industrial commercial applications. Each side panel is independently controllable, offering full lighting flexibility.


With adjustable wattage (40W-70W), wide beam optics, and ultra-high efficiency, it's the go-to solution for projects that demand precision and performance.

Model num	LC-LL1615
Power consumption	40W/50W/60W/70W (By DIP Switch)
Input voltage	220V~240V AC 50~60Hz
Dimension	L577xW140xH124mm
Adapter	4 Wire (3 Phase)
Luminous flux	Max 11000lm
CRI	Ra82
LEDs	SMD2835
Beam Angle	60deg/90deg
Finishing	Black/White
Tilting Angle	360deg+90deg
Warranty	5 Years


Dimensions drawing

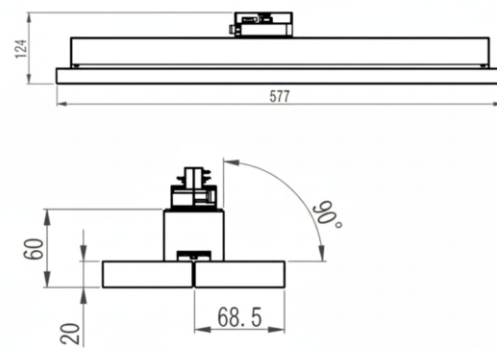

Light distribution curve

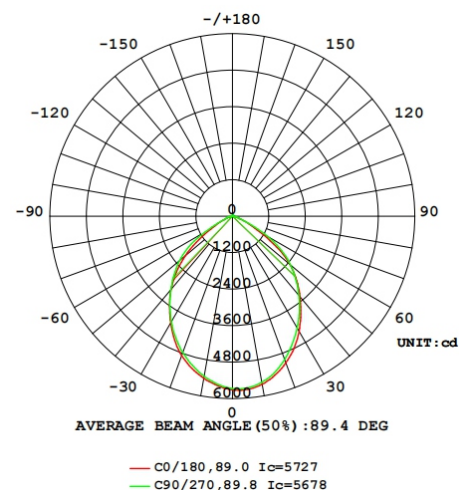


DiP setting




PIN1	PIN2	PIN3	PIN4	WATT
ON	ON	ON	ON	40W
OFF	ON	ON	OFF	50W
ON	OFF	ON	OFF	60W
OFF	OFF	OFF	OFF	70W

Set the lamp's wattage in the range of 40-70W, you must set the PIN1, PIN2 and PIN3 switches according to the table while the power is OFF. .


Installation Guide

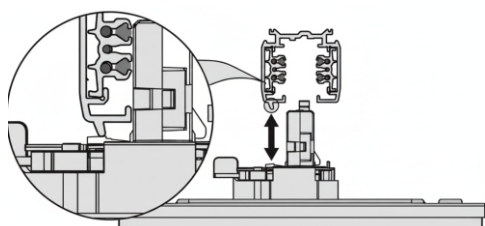

1. Mount the lamp on the 3-phase track rail system.



2. Install the track light in the correct direction

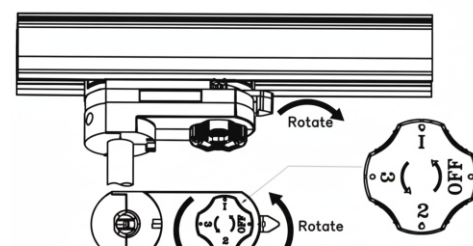

3. Set the phase selector to the appropriate position, 1, 2, or 3. And turn the selector to OFF, to remove the lamp from track. .