LOW-CARBON
诺可®智造

Retail Light

Dimensions drawing

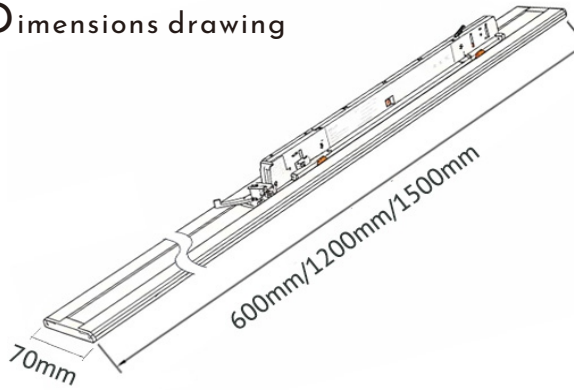

Ultra Slim LED Linear Track/LL1616

Tailored for commercial spaces like shops, showrooms, and offices, the LC-LL1616 Series is an ultra-slim LED linear light. Its 8mm thickness (excluding driver) delivers a sleek look,blending seamlessly with various decors.

Boasting 170lm/W high efficacy, CRI over 80, 2ft-5ft length options, and up to 10000lmoutput, plus a 5-year warranty, it's ideal for style and performance focused projects.

Model No.	Power	Size (mm)	Track	CRI	Lumen	Angle
LC-LL1616-2	20W	L600*W70mm	3 Phase	⩾80	3300lm	90°
LC-LL1616-4	40W	L1200*W70mm	3 Phase	⩾80	6500lm	90°
LC-LL1616-5	60W	L1500*W70mm	3 Phase	⩾80	9500lm	90°

Light distribution curve

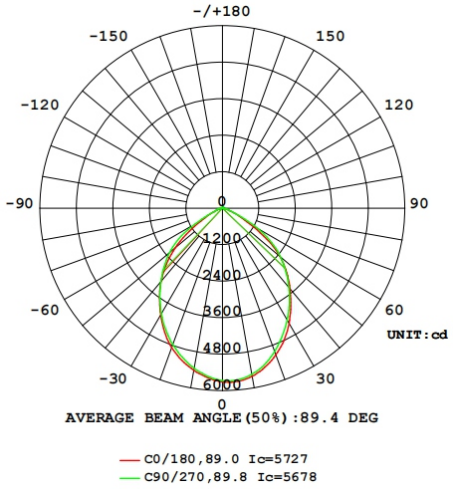

Installation Guide

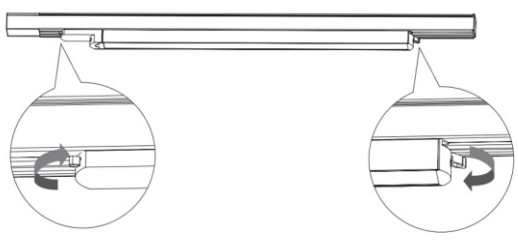

1.Mount the lamp on the 3-phase track rail system,Rotate the clasp to ensure the light has been fixed with the track well.

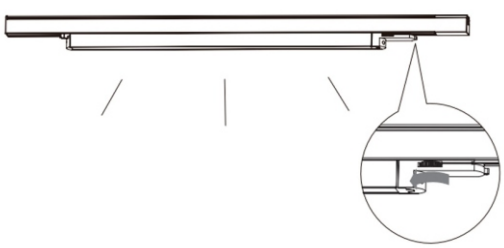

2.Adjust the rotary switch to the preferred circuit, turn on the power.

Tel: +86 189 2923 1353 www.lowcarbonled.com E-mail: info@lowcarbonled.com
Address: Block B, Floor 2nd, Building A, No. 16, Lefeng 8th Road, Maohui Industrial Zone, Henglan Town, Zhongshan City(528478), GD