INDOOR LUMINAIRES — LINEAR LIGHT · LINKABLE

LINA-K Continuous Run Linkable Linear Light

LL1614 20–40W DIP | MAX 6600 LM | 170 LM/W | 90° | UGR<22 | 168CM ×10 = 16.8M

220–240V AC 50/60Hz · STEEL WIRE SUSPENDED · WHITE / BLACK · 5-YEAR WARRANTY




KEY FACTS

LINA-K LL1614 is a continuous run linkable linear light for malls and boutiques — 168cm housings link end to end up to 10pcs for a seamless 16.8m line. Steel wire suspended for open ceilings at MAX 6600lm (20–40W DIP, 170 lm/W), CRI ≥80, 90° and UGR<22 with one-feed wiring.

POWER	20~40W (DIP 20/30/40W)
OUTPUT	MAX 6600 lm ±5% · 170 lm/W
LIGHT	CRI ≥80 · 90° · UGR<22
SUPPLY	220–240V AC 50/60Hz · PF>0.9
LENGTH	168cm per housing · max 10pcs 16.8m
FINISH	White Black


Shopping malls · Boutiques · Convenience stores · Retail aisles

ORDERING — LINA-K LL1614 · 168CM LINKABLE



ORDER CODE	POWER	SIZE (L)	BEAM	LINK
LC-LL1614	20~40W DIP	L1680mm (168cm)	90°	max 10pcs / 16.8m


※ DIP on board = 20W / 30W / 40W (MAX 6600lm ±5% at 40W) · White / Black at order · 90° PMMA optic
One 220–240V feed powers the linked run via joiners + end caps; wires & joiners included.

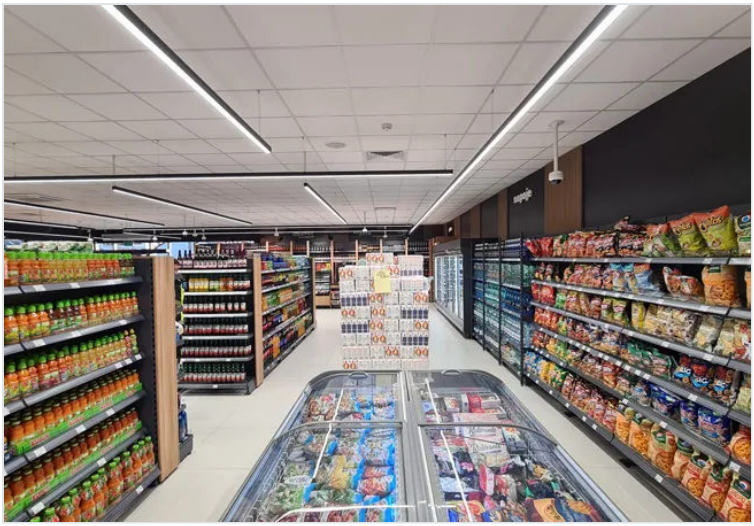

APPLICATION

- **Continuous run:** link 168cm modules end to end — 1 to 10pcs (1.68m to 16.8m) without gaps, one wire feeds the whole line.
- **Open ceiling:** twin steel wires per housing, height adjustable — levels cleanly over mall corridors and boutiques.
- **DIP 3-in-1:** 20W/30W/40W field selectable — stock one SKU, tune lux on site, MAX 6600lm at 170 lm/W.
- **Comfort:** UGR<22, CRI ≥80 and PF>0.9 for long runs — low glare along the entire link.

LIGHT DISTRIBUTION — 90° LINEAR WASH

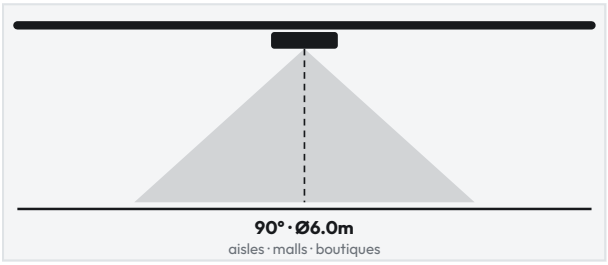

BEAM	Ø AT 3 M	BEST FOR
90°	Ø6.0m	Malls / boutiques / stores

Ø = 2 × 3 m × tan(θ/2) · schematic geometry, not measured photometry.

NOTES

- **Ordering:** White / Black finish; 20~40W DIP sets 20W/30W/40W in the same 168cm housing — specify finish at order.
- **Supply & control:** 220–240V AC 50/60Hz · PF>0.9 · DIP onboard; link up to 10pcs with joiners + end caps, one feed only.
- **Layout:** 168cm modules join without dark gaps; continuous runs 1.68m to 16.8m for boutique bays to mall corridors at UGR<22.
- **Warranty & family:** 5-year warranty with spare drivers and joiners; track linear see TRON-W LL1616, selectable see TRON-N LL1617.

Scan for live datasheet
https://www.lowcarbon-led.com/product/1614/