INDOOR LUMINAIRES — TRACK LIGHT

VUE-D Selectable Track Light

650 15W / 25W / 32W max | 120 LM/W | CRI >Ra90 | 15°/24°/36°/60° | DIP PRESET

220–240V · 3-PHASE 4-WIRE · WHITE / BLACK · 5-YEAR WARRANTY




KEY FACTS

VUE-D 650 is a 9-in-1 DIP-selectable track light — one housing covers 15/25/32W max (6/10/15W · 16/20/25W · 24/28/32W) and 3000/4000/6000K via field DIP switches at 120 lm/W and CRI >Ra90. Three housings deliver up to 1800lm, 3000lm and 3840lm on a standard 3-phase track with 15/24/36/60° optics.

POWER	15 / 25 / 32W max (DIP preset)
OUTPUT	1800 / 3000 / 3840 lm max · 120 lm/W
LIGHT	CRI >Ra90 · 15°/24°/36°/60°
CCT	3000/4000/6000K (DIP)
SUPPLY	220–240V · 3-phase 4-wire
FINISH	White Black

Supermarkets · Apparel shops · Exhibitions · Retail display

ORDERING — VUE-D 650 · 15W / 25W / 32W



ORDER CODE	POWER	SIZE (Ø×H)	CCT	BEAM
5415015S	6/10/15W	Ø71*85MM	3000/4000/6000K	15°/24°/36°/60°
5415025S	16/20/25W	Ø82*100MM	3000/4000/6000K	15°/24°/36°/60°
5415032S	24/28/32W	Ø100*105MM	3000/4000/6000K	15°/24°/36°/60°


※ Full code = table code + FIN(B/W) + CCT(K30/K40/K60), e.g. 5415015SB-K40 DIM S built in (DIP preset)
N=Non-dim · P=TRIAC · V=0-10V · D=DALI · C=Casambi BLE · R=Knob · S=DIP preset
Tracks 3/4/6-wire on request — contact sales for more.



APPLICATION

- **15° focal:** jewelry and star products — narrow beam for dramatic accent.
- **24–36° wash:** mannequins and shelving — even, comfortable light; 60° for wall wash.
- **Height rule:** 2.5–5 m ceilings · 1800lm at 15W, 3840lm at 32W for low to high bays.
- **Color rule:** CRI >Ra90 for true-to-life merchandise; DIP sets 3000/4000/6000K per housing.

LIGHT DISTRIBUTION — SELECTABLE 15° / 24° / 36° / 60°

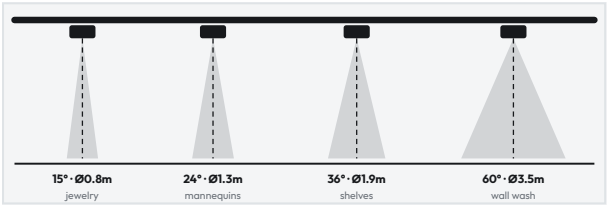

BEAM	Ø AT 3 M	BEST FOR
15°	Ø0.8m	Jewelry / focal display
24°	Ø1.3m	Mannequins / shelf wash
36°	Ø1.9m	Shelves / general accent
60°	Ø3.5m	Wall wash / exhibitions

Ø = 2 × 3 m × tan(θ/2) · schematic geometry, not measured photometry.

CCT LUMEN MULTIPLIER — RATED @4000K

CCT	MULTIPLIER	EXAMPLE (32W)
3000K	×0.95	3648lm
4000K	×1.00 (rated)	3840lm
6000K	×1.03	3955lm

Ordering-table lumens rated @4000K. Multipliers are the factory standard for this series; re-validate by LM-79 per CCT when available.

NOTES

- **Ordering:** DIP-selectable CCT (3000/4000/6000K) and power (6/10/15W · 16/20/25W · 24/28/32W) — one SKU covers 9 combos; choose White/Black finish and 15/24/36/60° optic at order.
- **Supply & control:** 220–240V AC 50/60Hz · 3-phase 4-wire adapter · non-dimmable on/off driver, power and CCT set by DIP before closing · switching via track circuit.
- **Layout:** 2.5–5 m mounting height; 15° for jewelry/focal, 24–36° for mannequins and shelving, 60° for wall wash and exhibitions.
- **Warranty & family:** 5-year warranty with spare drivers and modules; fixed-optic high efficacy see VUE-S TR0103, Casambi scenes see VUE-C.

Scan for live datasheet