INDOOR LUMINAIRES — TRACK LIGHT

VUE-S LED Track Light

TR0103 20W / 25W / 32W | 145 LM/W | CRI >Ra90 | 15°/24°/36°

220–240V · 3-PHASE TRACK · WHITE / BLACK · 5-YEAR WARRANTY




KEY FACTS

VUE-S TR0103 is a fixed-beam track light for retail and commercial display, delivering up to 145 lm/W at CRI >Ra90. Three wattages cover shelf wash to high-bay accent — 20W / 2850lm, 25W / 3550lm, 32W / 4500lm — on a standard 3-phase track with 15/24/36° optics.

POWER	20W / 25W / 32W
OUTPUT	2850 / 3550 / 4500 lm · 145 lm/W
LIGHT	CRI >Ra90 · 15°/24°/36°
CCT	3000/4000/5000K
SUPPLY	220–240V · 3-phase 4-wire
FINISH	White Black

Supermarkets · Apparel shops · Exhibitions · Commercial display

ORDERING — TR0103 · 20W / 25W / 32W

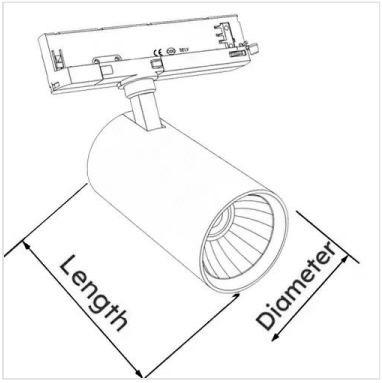

ORDER CODE	POWER	SIZE (Ø×H)	CCT	BEAM
5410020-15	20W	Ø72*123MM	3000/4000/5000K	15°
5410020-24	20W	Ø72*123MM	3000/4000/5000K	24°
5410020-36	20W	Ø72*123MM	3000/4000/5000K	36°
5410025-15	25W	Ø80*131MM	3000/4000/5000K	15°
5410025-24	25W	Ø80*131MM	3000/4000/5000K	24°
5410025-36	25W	Ø80*131MM	3000/4000/5000K	36°
5410032-15	32W	Ø90*141MM	3000/4000/5000K	15°
5410032-24	32W	Ø90*141MM	3000/4000/5000K	24°
5410032-36	32W	Ø90*141MM	3000/4000/5000K	36°


※ Full code = table code + FIN(B/W) + DIM(N/P/V/D) + CCT(K30/K40/K50), e.g. 5410020-15BP-K40
N=Non-dim · P=TRIAC · V=0-10V · D=DALI
Tracks 3/4/6-wire on request — contact sales for more.



APPLICATION

- **15° focal:** jewelry and star products — narrow beam for dramatic accent.
- **24–36° wash:** mannequins and product shelving — even, comfortable light.
- **Height rule:** 3–5 m ceilings · up to 4500lm for supermarkets and high-bay retail.
- **Color rule:** CRI >Ra90 for true-to-life merchandise; fresh-food cases see FLES-M.

LIGHT DISTRIBUTION — FIXED 15° / 24° / 36°

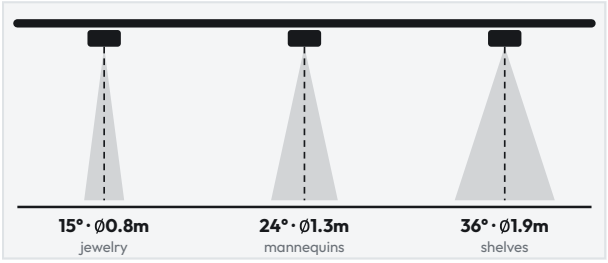

BEAM	Ø AT 3 M	BEST FOR
15°	Ø0.8m	Jewelry / focal display
24°	Ø1.3m	Mannequins / shelf wash
36°	Ø1.9m	Shelves / general accent

Ø = 2 × 3 m × tan(θ/2) · schematic geometry, not measured photometry.

CCT LUMEN MULTIPLIER — RATED @4000K @36°

CCT	MULTIPLIER	EXAMPLE (32W)
3000K	×0.95	4275lm
4000K	×1.00 (rated)	4500lm
5000K	×1.03	4635lm

Ordering-table lumens rated @4000K @36°. Multipliers are the factory standard for this series; re-validate by LM-79 per CCT when available.

NOTES

- **Ordering:** White / Black finish with fixed 15/24/36° optic — choose both at order.
- **Supply & control:** 220–240V AC 50/60Hz · 3-phase 4-wire adapter · TRIAC / 0-10V standard, DALI on request.
- **Layout:** 3–5 m mounting height; 15° for focal and jewelry, 24–36° for mannequins and shelving.
- **Warranty & family:** 5-year warranty with spare drivers and modules; changing displays see VARO-Z zoom, lower wattage see VUE-F.

Scan for live datasheet