INDOOR LUMINAIRES — TRI-PROOF LIGHT

TUBU-A Round Tubular Light

20W / 40W / 60W | 3000–9000 LM | 150 LM/W | IP65 | 120° FROSTED

220–240V · Ø76 × L600–1500 · CRI >80 · PF >0.95 · 5-YEAR WARRANTY




KEY FACTS

TUBU-A is a round LED tubular light for damp rooms, sealing its driver and SMD2835 board inside an IP65 Ø76mm tube. Three lengths cover compact wet rooms to wide halls — 20W/3000lm, 40W/6000lm, 60W/9000lm — at 150 lm/W with a 120° frosted beam.

POWER	20W / 40W / 60W
OUTPUT	3000 / 6000 / 9000 lm · 150 lm/W
LIGHT	CRI >80 · 120° Frosted
CCT	3000/4000/6000K
SUPPLY	220–240V AC 50/60Hz · PF >0.9
PROTECTION	IP65 · Sealed round tube
SIZE	Ø76×L600 / L1200 / L1500

Damp rooms · Corridors · Wash areas · Bathrooms

ORDERING — TUBU-A · 20W / 40W / 60W · 120°



ORDER CODE	POWER	SIZE (Ø×L)	LUMEN @4000K	BEAM
5713020	20W	Ø76×L600mm	3000lm	120°
5713040	40W	Ø76×L1200mm	6000lm	120°
5713060	60W	Ø76×L1500mm	9000lm	120°


※ Full code = table code + CCT(K30/K40/K60), e.g. 5713040-K40 (40W 4000K)
4000K rated, 3000/6000K on request · Non-dim 220–240V AC direct
Surface clips + suspension kit included, wall bracket optional — custom length on request — contact sales.



APPLICATION

- **Damp rooms:** sealed Ø76mm round body sheds water where flat battens trap grime on top.
- **Corridors:** twist-off end cap with PG gland wires rows in minutes — no special tools.
- **Wash areas:** IP65 silicone seals survive daily hose-downs; never submerge or pressure-wash.
- **Height rule:** 2.5–5 m — 20W for low wet rooms, 40W for corridors, 60W for wide halls.

LIGHT DISTRIBUTION — FIXED 120° FROSTED

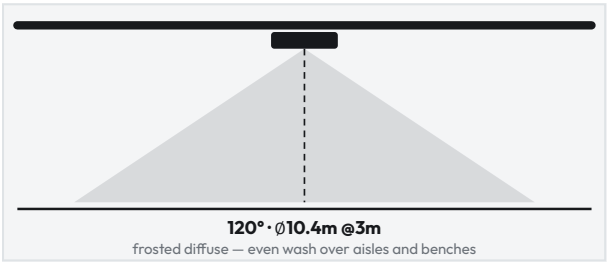

BEAM	ø AT 3 M	BEST FOR
120°	ø10.4m	Uniform wash over corridors and halls

Frosted cover — even light without glare

ø = 2 × 3 m × tan(θ/2) · schematic geometry, not measured photometry.

CCT LUMEN MULTIPLIER — RATED @4000K

CCT	MULTIPLIER	EXAMPLE (40W)
3000K	×0.95	5700lm
4000K	×1.00 (rated)	6000lm
6000K	×1.03	6180lm

Ordering-table lumens rated @4000K. Multipliers are the factory standard for this series; re-validate by LM-79 per CCT when available.

NOTES

- **Ordering:** Round sealed tube in 20/40/60W — choose wattage and 3000/4000/6000K CCT at order; see ※ for CCT suffix.
- **Supply & control:** 220–240V AC 50/60Hz · PF >0.95 · Non-dim direct · twist-off end cap with PG waterproof gland.
- **Layout:** 2.5–5 m mounting height — surface clips and suspension kit included, wall bracket optional; 120° frosted gives even wash.
- **Warranty & family:** 5-year warranty covering driver and LED board, 50000h rated life; high racking aisles see FORT-A, bathrooms see AQUA-D.

Scan for live datasheet