INDOOR LUMINAIRES — TRACK LIGHT

VUE-C Casambi Track Light

20W / 25W / 32W | 145 LM/W | CRI >Ra90 | 15°/24°/36° | CASAMBI

220–240V · 3-PHASE 4-WIRE · WHITE / BLACK · 5-YEAR WARRANTY




KEY FACTS

VUE-C is a Casambi Bluetooth-mesh track light that dims, groups and recalls scenes from a phone app with mains power only — no control wires to pull. Built-in Allooking Casambi driver delivers 145 lm/W at CRI >Ra90 across 20W/2850lm, 25W/3550lm and 32W/4500lm on a standard 3-phase track with 15/24/36° optics.

POWER	20W / 25W / 32W
OUTPUT	2850 / 3550 / 4500 lm · 145 lm/W
LIGHT	CRI >Ra90 · 15°/24°/36°
CCT	3000/4000/5000K
SUPPLY	220–240V · 3-phase 4-wire
FINISH	White Black

Supermarkets | Apparel shops | Wine stores | Retail display

ORDERING — VUE-C · 20W / 25W / 32W

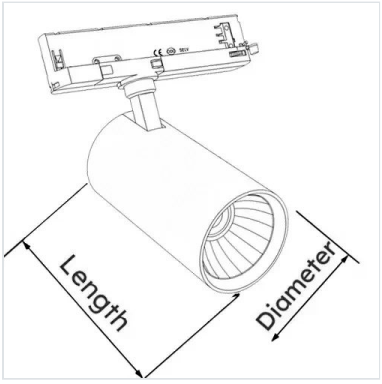

ORDER CODE	POWER	SIZE (Ø×H)	CCT	BEAM
5413020-15C	20W	Ø72*123MM	3000/4000/5000K	15°
5413020-24C	20W	Ø72*123MM	3000/4000/5000K	24°
5413020-36C	20W	Ø72*123MM	3000/4000/5000K	36°
5413025-15C	25W	Ø80*131MM	3000/4000/5000K	15°
5413025-24C	25W	Ø80*131MM	3000/4000/5000K	24°
5413025-36C	25W	Ø80*131MM	3000/4000/5000K	36°
5413032-15C	32W	Ø90*141MM	3000/4000/5000K	15°
5413032-24C	32W	Ø90*141MM	3000/4000/5000K	24°
5413032-36C	32W	Ø90*141MM	3000/4000/5000K	36°


※ Full code = table code + FIN(B/W) + CCT(K30/K40/K50), e.g. 5413020-15CB-K40 DIM C built in (Casambi BLE only)
N=Non-dim · P=TRIAC · V=0-10V · D=DALI · C=Casambi BLE · R=Knob · S=DIP preset
Tracks 3/4/6-wire on request — contact sales for more.



APPLICATION

- **15° focal:** jewelry and star products — narrow beam for dramatic accent.
- **24–36° wash:** mannequins and product shelving — even, comfortable light.
- **Height rule:** 3–5 m ceilings · up to 4500lm for supermarkets and high-bay retail.
- **Color rule:** CRI >Ra90 for true-to-life merchandise; per-fixture Casambi scenes with no control wires.

LIGHT DISTRIBUTION — FIXED 15° / 24° / 36°

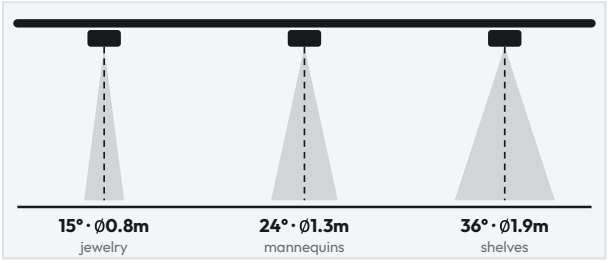

BEAM	Ø AT 3 M	BEST FOR
15°	Ø0.8m	Jewelry / focal display
24°	Ø1.3m	Mannequins / shelf wash
36°	Ø1.9m	Shelves / general accent

Ø = 2 × 3 m × tan(θ/2) · schematic geometry, not measured photometry.

CCT LUMEN MULTIPLIER — RATED @4000K @36°

CCT	MULTIPLIER	EXAMPLE (32W)
3000K	×0.95	4275lm
4000K	×1.00 (rated)	4500lm
5000K	×1.03	4635lm

Ordering-table lumens rated @4000K @36°. Multipliers are the factory standard for this series; re-validate by LM-79 per CCT when available.

NOTES

- **Ordering:** White / Black finish with fixed 15/24/36° optic — choose both at order.
- **Supply & control:** 220–240V AC 50/60Hz · 3-phase 4-wire adapter · Casambi Bluetooth mesh, app 1–100% dimming, flicker-free; standby <0.5W, PF >0.9.
- **Layout:** 3–5 m mounting height; 15° for focal and jewelry, 24–36° for mannequins and shelving; per-fixture groups and scenes via app, no control wires.
- **Warranty & family:** 5-year warranty with spare drivers and modules; wired DALI/TRIAC see VUE-S TR0103 / VUE-T, zoom displays see VARO-Z.

Scan for live datasheet