INDOOR LUMINAIRES — TRACK LIGHT

VUE-K LED Track Light

VUE-K 20W / 25W / 32W | 145 LM/W | CRI >Ra90 | 15°/24°/36°

220–240V · 4-WIRE TRACK · WHITE / BLACK · 5-YEAR WARRANTY




KEY FACTS

VUE-K is a CCT-selectable, knob-dimmable track light for retail display, pairing a 145 lm/W CRI >Ra90 engine with a 3-step dial and stepless knob on every head. Three wattages — 20W/2850lm, 25W/3550lm, 32W/4500lm — set tone and brightness by hand with no wall dimmer, no app and no wires on a 4-wire track, 15/24/36° optics.

POWER	20W / 25W / 32W
OUTPUT	2850 / 3550 / 4500 lm · 145 lm/W
LIGHT	CRI >Ra90 · 15°/24°/36°
CCT	Warm / Neutral / Cool (3-step dial)
SUPPLY	220–240V · 4-wire track
FINISH	White Black

Supermarkets | Apparel shops | Produce displays | Wine & specialty

ORDERING — VUE-K · 20W / 25W / 32W

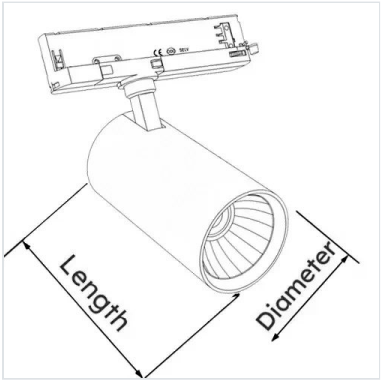

ORDER CODE	POWER	SIZE (Ø×H)	CCT	BEAM
5412020-15R	20W	Ø72*123MM	Warm/Neutral/Cool	15°
5412020-24R	20W	Ø72*123MM	Warm/Neutral/Cool	24°
5412020-36R	20W	Ø72*123MM	Warm/Neutral/Cool	36°
5412025-15R	25W	Ø80*131MM	Warm/Neutral/Cool	15°
5412025-24R	25W	Ø80*131MM	Warm/Neutral/Cool	24°
5412025-36R	25W	Ø80*131MM	Warm/Neutral/Cool	36°
5412032-15R	32W	Ø90*141MM	Warm/Neutral/Cool	15°
5412032-24R	32W	Ø90*141MM	Warm/Neutral/Cool	24°
5412032-36R	32W	Ø90*141MM	Warm/Neutral/Cool	36°


※ Full code = table code + FIN(B/W) + CCT(K30/K40/K50), e.g. 5412020-15RB-K40 · DIM R built in (Knob only)
N=Non-dim · P=TRIAC · V=0-10V · D=DALI · C=Casambi · R=Knob · S=DIP preset
Tracks 3/4/6-wire on request — contact sales for more.



APPLICATION

- **15° focal:** jewelry and star products — narrow beam for dramatic accent.
- **24–36° wash:** mannequins and product shelving — even, comfortable light.
- **Height rule:** 3–5 m ceilings · up to 4500lm for supermarkets and produce aisles.
- **Color rule:** CRI >Ra90 true-to-life; each head's CCT dial sets Warm/Neutral/Cool live, no rewiring.

LIGHT DISTRIBUTION — FIXED 15° / 24° / 36°

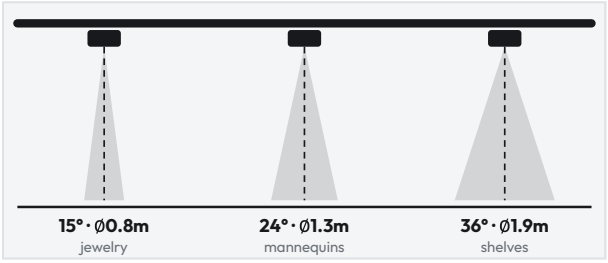

BEAM	Ø AT 3 M	BEST FOR
15°	Ø0.8m	Jewelry / focal display
24°	Ø1.3m	Mannequins / shelf wash
36°	Ø1.9m	Shelves / general accent

Ø = 2 × 3 m × tan(θ/2) · schematic geometry, not measured photometry.

CCT LUMEN MULTIPLIER — RATED @4000K @36°

CCT	MULTIPLIER	EXAMPLE (32W)
3000K	×0.95	4275lm
4000K	×1.00 (rated)	4500lm
5000K	×1.03	4635lm

Ordering-table lumens rated @4000K @36°. Multipliers are the factory standard for this series; re-validate by LM-79 per CCT when available.

NOTES

- **Ordering:** 3-step CCT dial + knob dim built in — no wall dimmer/app; choose White/Black finish and 15/24/36° optic at order; exact Kelvin per step confirmed before shipment.
- **Supply & control:** 220–240V AC 50/60Hz · 4-wire track adapter · stepless knob dimming live on each head · no control wires.
- **Layout:** 3–5 m mounting height; 15° for jewelry/focal, 24–36° for mannequins and shelving; each head tuned independently.
- **Warranty & family:** 5-year warranty with spare knob-CCT adapters; for wall-dimmer circuits see VUE-T, for one-SKU distributor stock see VUE-D 650.

Scan for live datasheet