INDOOR LUMINAIRES — TRACK LIGHT

VARO-Z Zoomable Track Light

ZT01 15W / 20W / 25W | 145 LM/W | CRI >Ra90 | Zoom 10°–55°

220–240V · 3-PHASE TRACK · WHITE / BLACK · 5-YEAR WARRANTY




KEY FACTS

VARO-Z ZT01 is a zoomable track light for museums, galleries and changing exhibitions, covering **10–55° stepless in one head** without lens swaps. Three wattages span intimate to high halls — 15W/1450lm, 20W/2000lm, 25W/2400lm — on a 3-phase track at >Ra90 and 145 lm/W.

POWER	15W / 20W / 25W
OUTPUT	1450 / 2000 / 2400 lm · 145 lm/W
LIGHT	CRI >Ra90 · Zoom 10°–55°
CCT	3000/4000/5000K
SUPPLY	220–240V · 3-phase 4-wire
FINISH	White Black

Museums · Galleries · + Exhibitions · Retail display

ORDERING — ZT01 · 15W / 20W / 25W

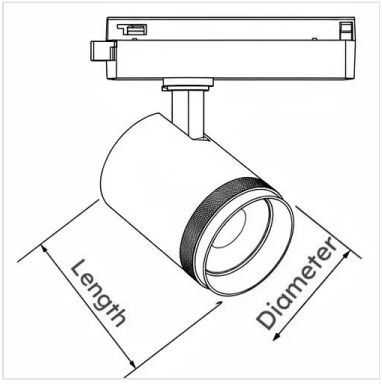

ORDER CODE	POWER	SIZE (Ø×H)	CCT	BEAM
5416015	15W	Ø65×98MM	3000/4000/5000K	Zoom 10–55°
5416020	20W	Ø75×120MM	3000/4000/5000K	Zoom 10–55°
5416025	25W	Ø85×120MM	3000/4000/5000K	Zoom 10–55°


※ Full code = table code + FIN(B/W) + DIM(N/P/V/D) + CCT(K30/K40/K50), e.g. 5416020BP-K40
N=Non-dim · P=TRIAC · V=0-10V · D=DALI
Tracks 3/4/6-wire on request — contact sales for more.



APPLICATION

- **10° narrow:** sculpture and jewelry — tight pool without flooding surround.
- **55° wide:** wall wash for canvases and exhibition walls — one head covers spot to flood.
- **Height rule:** 2.5–5 m ceilings · up to 2400lm; twist front ring, no lens swap.
- **Color rule:** CRI >Ra90 for true artwork; 350° pan + 90° tilt for last-minute re-aim.

LIGHT DISTRIBUTION — ZOOM 10°–55° STEPLESS

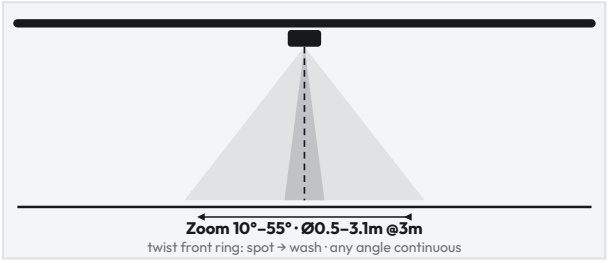

BEAM	Ø AT 3 M	BEST FOR
10°	Ø0.5m	Sculpture / focal
35°	Ø1.9m	Artwork bay
55°	Ø3.1m	Wall wash / exhibition

Ø = 2 × 3 m × tan(θ/2) · schematic geometry, not measured photometry · zoom continuous, set any angle 10–55°.

CCT LUMEN MULTIPLIER — RATED @4000K

CCT	MULTIPLIER	EXAMPLE (25W)
3000K	×0.95	2280lm
4000K	×1.00 (rated)	2400lm
5000K	×1.03	2472lm

Ordering-table lumens rated @4000K. Multipliers are the factory standard for this series; re-validate by LM-79 per CCT when available.

NOTES

- **Ordering:** White / Black finish with stepless 10–55° zoom — choose finish and dimming at order.
- **Supply & control:** 220–240V AC 50/60Hz · 3-phase 4-wire adapter · TRIAC / 0-10V standard, DALI on request.
- **Layout:** 2.5–5 m mounting height; 10° for sculpture focal, 55° for wall wash; 350° pan + 90° tilt for re-aim.
- **Warranty & family:** 5-year warranty with spare drivers and modules; fixed-beam retail see VUE-S TR0103.

Scan for live datasheet