OUTDOOR LUMINAIRES — BOLLARD

SEMI Heavy Duty LED Pathway Bollard

SEMI SER 7W flood · 108×108 head | SMD | 2700K / 4000K | Ra80

HEIGHTS 300 / 400 / 600 / 800 / 1000 MM · DIE-CAST AL + PC · 100–240V




KEY FACTS

SEMI is a heavy duty pathway bollard that washes the pavement, not a spot accent. One 7W SMD flood head in a 108×108mm thickened aluminum body — five heights from 30 to 100cm in Sand Black or Sand Gray at 2700K/4000K Ra80.

POWER	7W · single family
HEIGHTS	300–1000 mm · 5 models
LIGHT	SMD · 2700K/4000K · Ra80
BODY	AL + PC · 100–240V · Non-dim
FINISH	Sand Black Sand Gray

Driveways | Entrances | Garden borders | Lawns | Pathways

ORDERING — SEMI FLOOD · 7W

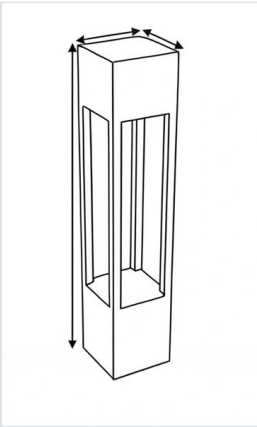

PRODUCT	DIMENSION	CRI	CCT	POWER
441030 12K3/K4	108*108*300MM	Ra80	2700K/4000K	7W
441040 12K3/K4	108*108*400MM	Ra80	2700K/4000K	7W
441060 12K3/K4	108*108*600MM	Ra80	2700K/4000K	7W
441080 12K3/K4	108*108*800MM	Ra80	2700K/4000K	7W
4410100 12K3/K4	108*108*1000MM	Ra80	2700K/4000K	7W



APPLICATION

- **Flood first:** SEMI washes the driveway surface for safe footing — for accent spot on trees or signs see BAM.
- **Height rule:** 60–100 cm for driveways so the head clears bonnets and planting · 30–40 cm for garden borders.
- **Spacing rule:** 8–12 ft apart with pools overlapping, staggered on one side, each post 12–24 in back from the wheel line.
- **CCT rule:** 2700K flatters planting and brick entrances · 4000K reads edges and plates more crisply.

NOTES

- **Ordering suffix:** K3 = 2700K · K4 = 4000K — one CCT per project across all five heights.
- **Supply & build:** 100–240V direct mains · non-dimmable · die-cast AL + PC in Sand Black or Sand Gray.
- **Fixing:** bolt each post to a concrete footing with anchor bolts; keep it outside the wheel line.
- **Family guidance:** for glare-free poolside decks see VOID · for accent spot see BAM.

Scan for live datasheet